
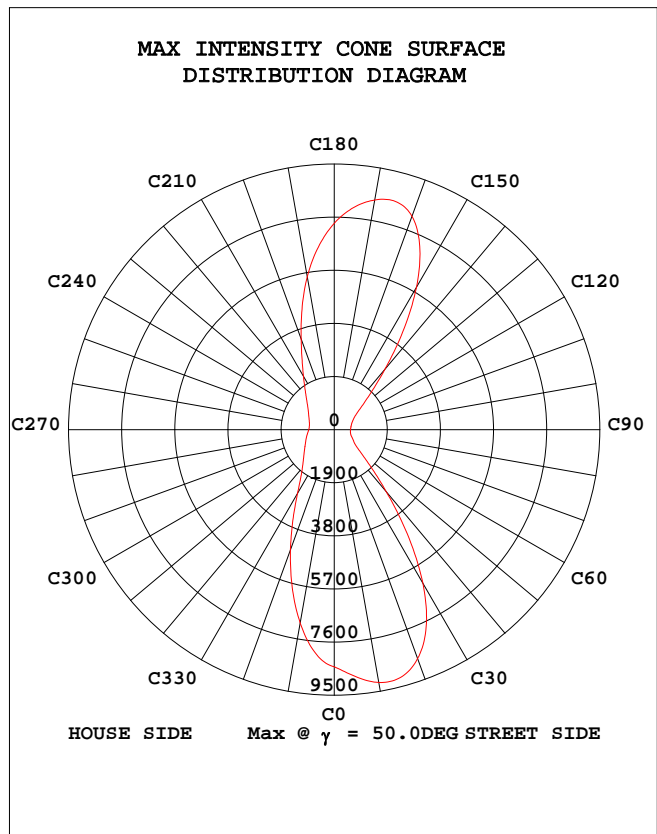


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:35.98V I:2.767A P:99.57W PF:1.000 Freq:0Hz Lamp Flux:12799.2x1 lm		
NAME: ALL in one Led Solar Street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: SHENZHEN LEADRAY OPTOELECTRONIC CO.,LTD	SUR.:	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 128.55 lm/W			
MODEL	LRC100W-001H	I _{max} (cd)	9181	η street_up(%)	0.3
NOMINAL POWER(W)	100	LOR(%)	100.0	η street_down(%)	63.3
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	12799	η house_up(%)	0.4
NOMINAL FLUX(lm)	12799.2	MAXIMUM @(C,γ)	10,50.0	η house_down(%)	36.1
LAMPS INSIDE	1	η up(%)	0.7	76 FLASHAREA(m2)	0.00100
TEST VOLTAGE(V)	24	η down(%)	99.3	SLI	19.026

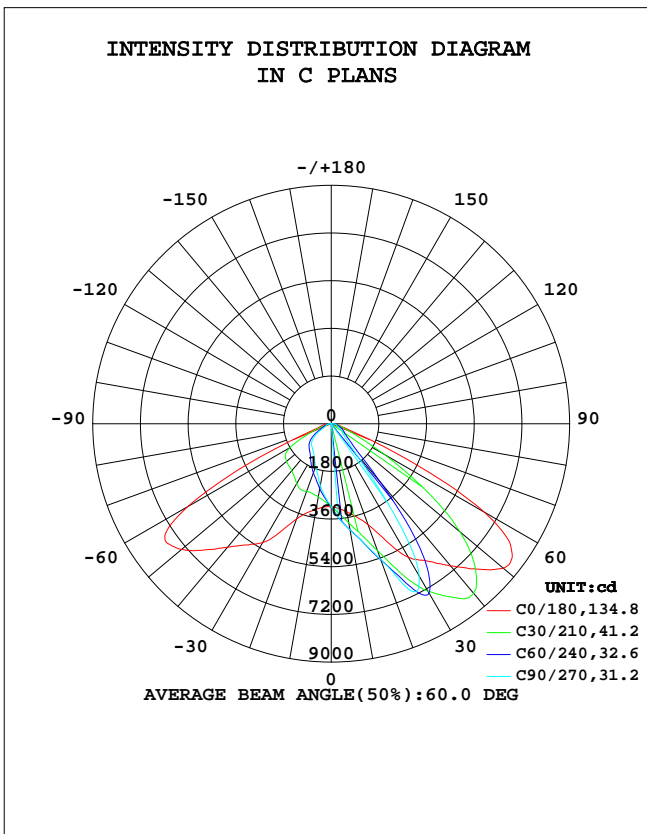


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-09-14

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:35.98V I:2.767A P:99.57W PF:1.000 Freq:0Hz Lamp Flux:12799.2x1 lm		
NAME: ALL in one Led Solar Street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: SHENZHEN LEADRAY OPTELECTRONIC CO.,LTD	SUR.:	Shielding Angle:N/A

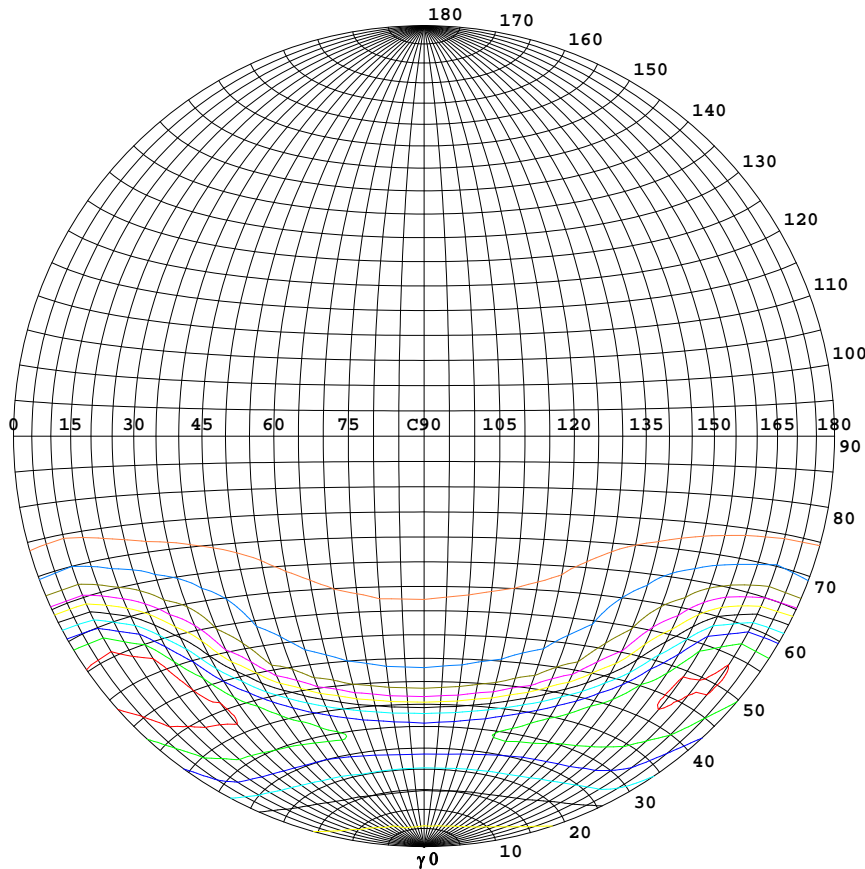

Classification:


IES:Type I - Short
 CIE:Narrow - Short
 IES:Cut-off
 CIE:Full cut-off
 Max.At80:24.15cd/klm
 Max.At90:4.248cd/klm
 Max.80-90:24.15cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
I _{max} =100%	9181
90%	8263
80%	7345
70%	6427
60%	5509
50%	4591
40%	3673
30%	2754
20%	1836
10%	918
5%	459

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-09-14

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

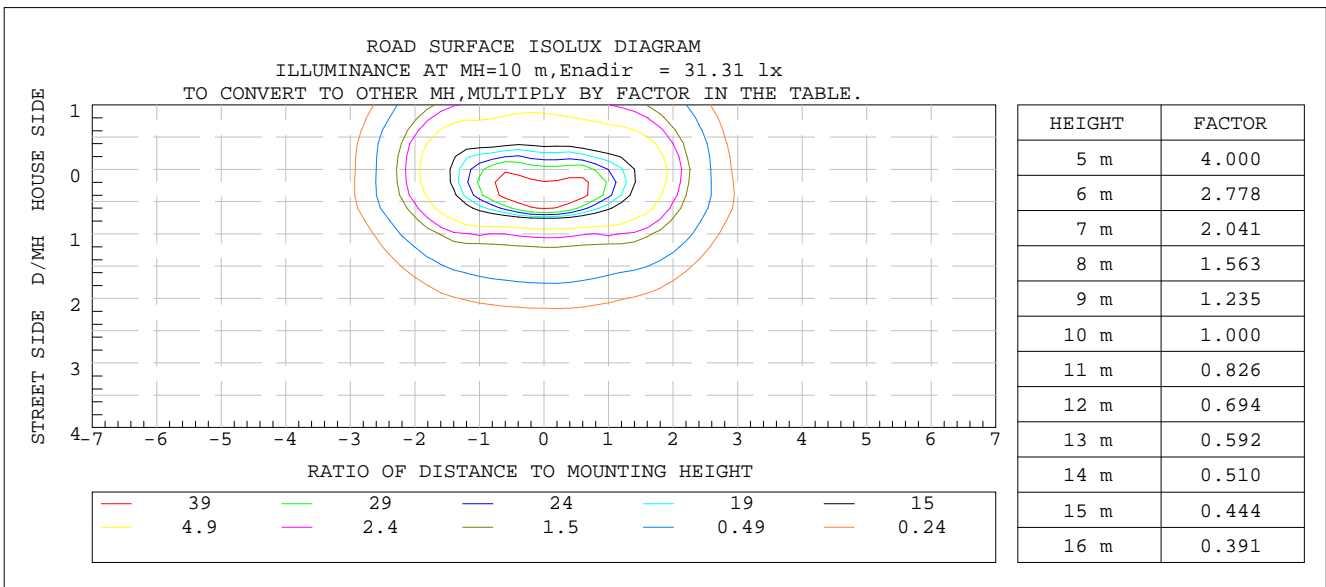

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators: William
Test Date: 2017-09-14

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity: 65.7%
Test Distance: 26.000m [K=1.4470]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:35.98V I:2.767A P:99.57W PF:1.000 Freq:0Hz Lamp Flux:12799.2x1 lm		
NAME: ALL in one Led Solar Street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: SHENZHEN LEADRAY OPTELECTRONIC CO.,LTD	SUR.:	Shielding Angle:N/A


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	lum,lamp
10	3373	3935	4070	3911	3281	2622	2372	2694	0- 10	307.2	307.2	2.4,2.4
20	4053	5309	5444	5185	3822	2287	1734	2431	10- 20	995.6	1303	10.2,10.2
30	5822	7480	6639	7430	5180	1957	1322	2121	20- 30	2022	3325	26,26
40	7010	6001	1331	6057	6086	1638	1136	1796	30- 40	2744	6068	47.4,47.4
50	8478	2049	584.3	2042	7382	1403	914.3	1599	40- 50	2650	8718	68.1,68.1
60	6666	901.7	409.8	920.4	6251	979.2	405.9	1196	50- 60	2468	11186	87.4,87.4
70	832.7	441.2	241.0	457.0	814.9	356.0	216.2	407.3	60- 70	1136	12322	96.3,96.3
80	244.7	183.5	179.0	164.4	309.1	86.05	121.7	109.9	70- 80	305.8	12628	98.7,98.7
90	20.54	29.26	54.36	19.51	14.10	11.69	8.454	13.62	80- 90	86.86	12715	99.3,99.3
100	1.041	0.8719	0.6273	0.8621	2.016	19.54	37.72	17.73	90-100	10.93	12726	99.4,99.4
110	12.50	13.36	1.409	13.44	14.11	16.20	24.98	15.90	100-110	12.89	12739	99.5,99.5
120	14.10	11.28	18.38	10.07	16.02	17.24	28.16	14.25	110-120	14.44	12753	99.6,99.6
130	16.58	10.48	10.51	10.06	15.78	22.97	29.81	16.90	120-130	14.17	12767	99.8,99.8
140	17.13	12.25	9.802	11.52	14.58	20.82	12.23	16.61	130-140	11.76	12779	99.8,99.8
150	16.12	12.13	9.335	11.13	13.06	16.82	12.53	14.64	140-150	9.099	12788	99.9,99.9
160	13.78	12.88	10.90	11.64	12.74	16.10	11.21	12.13	150-160	6.222	12794	100,100
170	13.86	12.84	11.85	10.73	13.06	14.12	13.33	11.16	160-170	3.645	12798	100,100
180	13.62	14.85	13.17	12.43	13.86	14.48	13.25	13.14	170-180	1.244	12799	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-09-14

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:35.98V I:2.767A P:99.57W PF:1.000 Freq:0Hz Lamp Flux:12799.2x1 lm		
NAME: ALL in one Led Solar Street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: SHENZHEN LEADRAY OPTELECTRONIC CO.,LTD	SUR.:	Shielding Angle:N/A

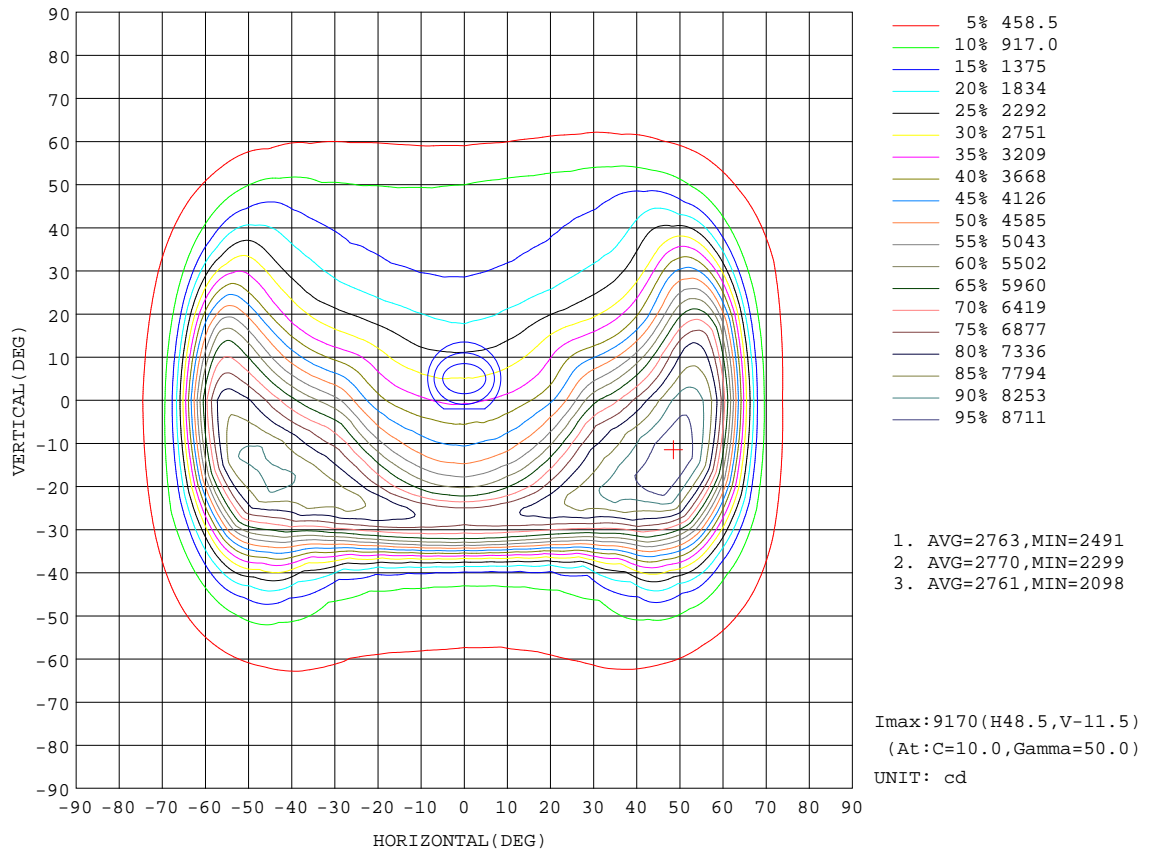

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-09-14

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

Planar Illuminance Curve

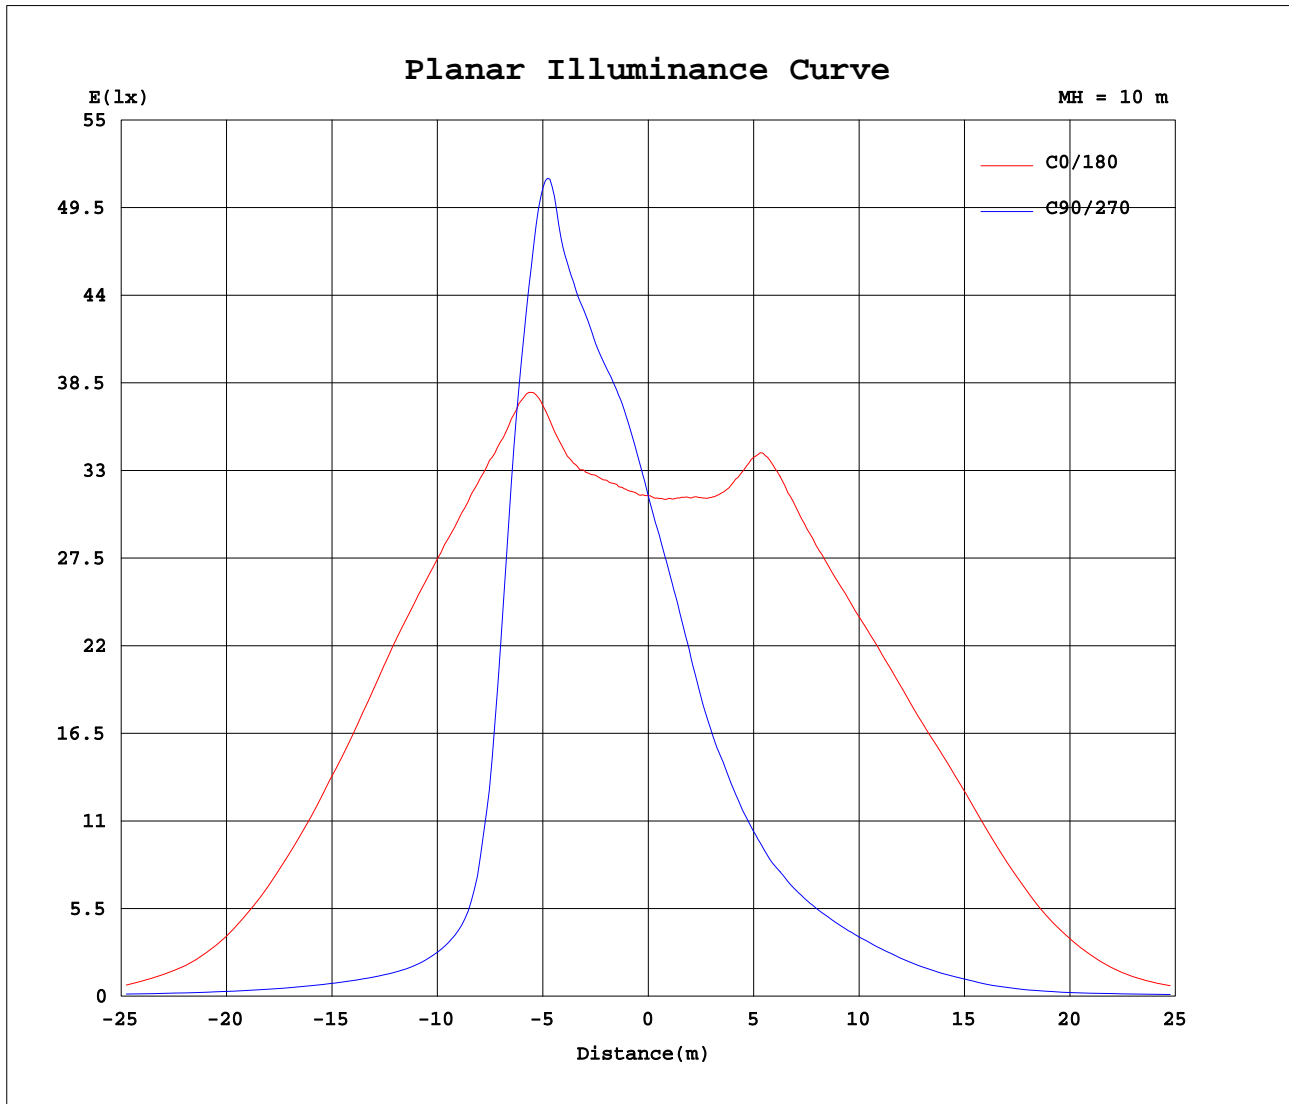


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators: William
Test Date: 2017-09-14

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity: 65.7%
Test Distance: 26.000m [K=1.4470]
Remarks:

LCS REPORT

Test:U:35.98V I:2.767A P:99.57W PF:1.000 Freq:0Hz Lamp Flux:12799.2x1 lm		
NAME: ALL in one Led Solar Street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: SHENZHEN LEADRAY OPTELECTRONIC CO.,LTD	SUR.:	Shielding Angle:N/A

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

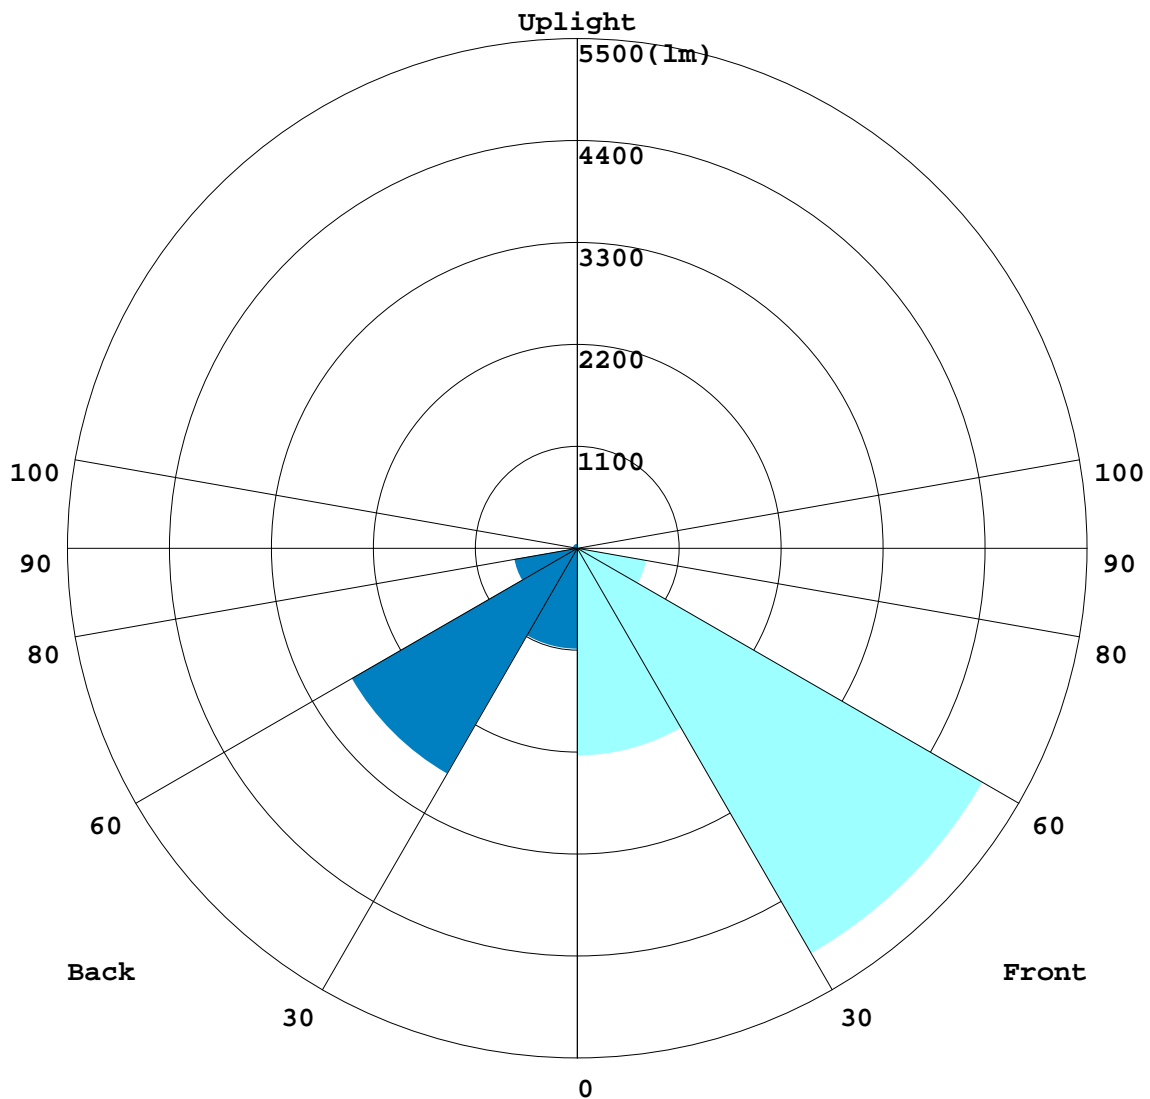

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-09-14

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

BUG REPORT

Test:U:35.98V I:2.767A P:99.57W PF:1.000 Freq:0Hz Lamp Flux:12799.2x1 lm		
NAME: ALL in one Led Solar Street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: SHENZHEN LEADRAY OPTELECTRONIC CO.,LTD	SUR.:	Shielding Angle:N/A

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	2238.7	17.5
FM - Front-Medium(30-60)	5051.1	39.5
FH - Front-High(60-80)	755.63	5.9
FVH - Front-Very High(80-90)	53.934	0.4
Total Forward Light	8131.5	63.5

BL - Back-Low(0-30)	1085.9	8.5
BM - Back-Medium(30-60)	2810	22.0
BH - Back-High(60-80)	686.61	5.4
BVH - Back-Very High(80-90)	32.926	0.3
Total Back Light	4667.7	36.5

UL - Uplight-Low(90-100)	10.927	0.1
UH - Uplight-High(100-180)	73.476	0.6
Total Up Light	84.403	0.7

BUG(Back,Up,Glare) Rating	B3-U3-G2
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	4615.4	52.313	4667.7
Street Side	8099.4	32.09	8131.5


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-09-14

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

ROAD ISOCANDELA REPORT

Test:U:35.98V I:2.767A P:99.57W PF:1.000 Freq:0Hz Lamp Flux:12799.2x1 lm		
NAME: ALL in one Led Solar Street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: SHENZHEN LEADRAY OPTOELECTRONIC CO.,LTD	SUR.:	Shielding Angle:N/A

ROAD SURFACE ISOCANDELA DIAGRAM

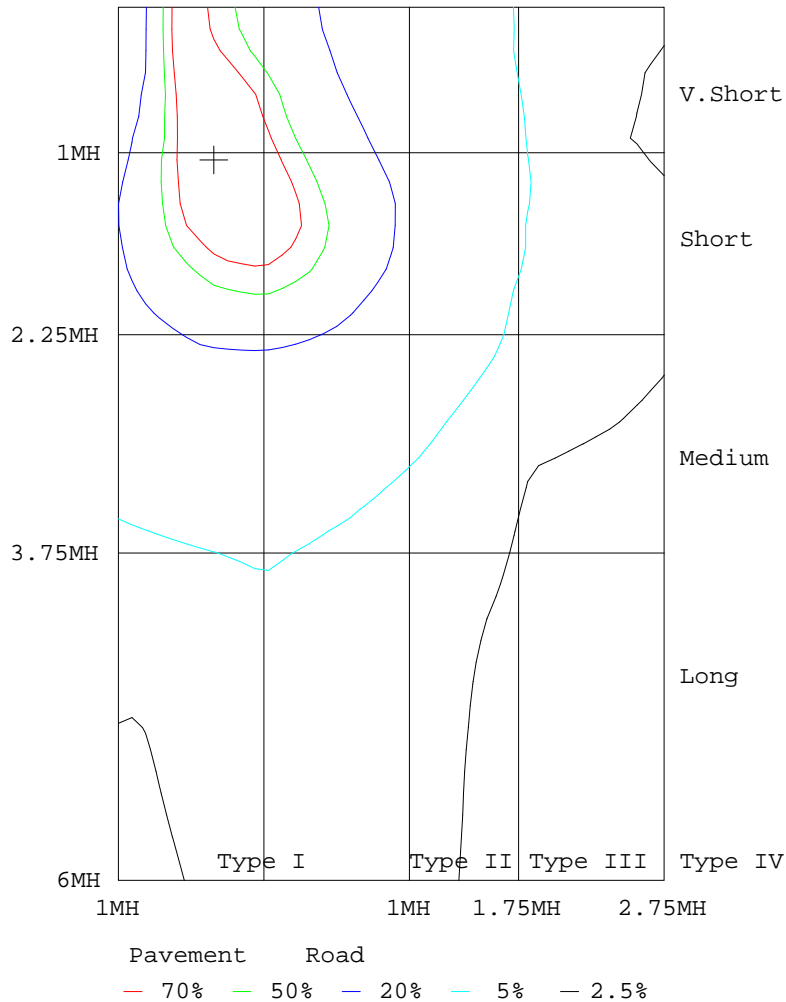

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-09-14

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:35.98V I:2.767A P:99.57W PF:1.000 Freq:0Hz Lamp Flux:12799.2x1 lm		
NAME: ALL in one Led Solar Street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: SHENZHEN LEADRAY OPTELECTRONIC CO.,LTD	SUR.:	Shielding Angle:N/A

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	3143	3132	3137	3131	3129	3123	3156	3153	3151	3140	3146	3131	3131	3129	3134	3124	3120	3120	3143
5	3208	3282	3358	3405	3478	3515	3596	3616	3624	3610	3613	3582	3551	3511	3465	3393	3295	3226	3156
10	3373	3539	3688	3793	3904	3966	4057	4095	4087	4070	4076	4036	4007	3948	3875	3772	3602	3453	3281
15	3633	3928	4157	4317	4451	4540	4622	4657	4659	4628	4628	4563	4519	4451	4359	4221	4010	3765	3470
20	4053	4520	4847	5096	5266	5352	5476	5467	5465	5444	5426	5383	5343	5261	5109	4907	4605	4259	3822
25	4856	5509	5947	6228	6378	6420	6599	6781	6863	6890	6864	6730	6482	6308	6182	5960	5578	5119	4473
30	5822	6692	7139	7299	7429	7532	7379	7006	6764	6639	6793	7093	7495	7596	7264	7057	6700	6130	5180
35	6333	7384	7816	7998	7989	7037	6011	5004	4238	4004	4323	5151	6167	7225	8004	7829	7440	6729	5586
40	7010	8046	8427	8359	7000	5003	2933	1859	1407	1331	1479	1998	3094	5131	6982	8209	8077	7372	6086
45	7765	8697	8883	7685	5102	2233	1189	922	805	784	829	950	1284	2387	4919	7405	8402	7995	6738
50	8478	9181	8715	6343	2901	1197	800	649	592	584	610	670	811	1267	2818	5884	8130	8340	7382
55	8309	8494	7307	4292	1762	851	619	539	501	497	514	544	614	879	1776	4018	6962	8033	7656
60	6666	6338	4570	2302	1132	672	537	457	414	410	428	460	520	675	1166	2316	4573	6028	6251
65	3058	2968	1864	1054	722	550	433	361	326	316	336	363	427	544	780	1197	1982	2707	2913
70	833	911	694	566	474	408	338	285	246	241	252	283	326	410	504	633	779	951	815
75	401	414	377	325	312	288	255	210	196	202	199	214	241	278	317	352	395	413	438
80	245	199	227	188	176	191	195	169	167	179	167	169	184	176	152	170	220	158	309
85	82.9	85.6	88.9	91.8	76.7	104	126	127	115	118	118	119	102	84.6	57.8	61.2	63.8	61.3	87.3
90	20.5	32.7	31.6	26.0	25.1	33.4	49.2	52.0	51.2	54.4	48.0	46.5	38.8	22.0	17.0	21.1	22.4	18.7	14.1
95	6.11	6.33	4.15	1.82	0.89	0.65	0.72	0.79	0.87	0.86	0.87	0.79	0.79	0.79	0.96	1.44	2.24	2.87	4.28
100	1.04	1.37	3.62	0.64	0.48	1.26	0.56	0.55	0.55	0.63	0.63	0.63	0.86	0.94	0.79	0.79	3.79	1.74	2.02
105	8.15	10.4	12.2	15.1	6.19	3.92	2.61	1.27	0.55	0.63	0.63	1.34	2.59	3.78	10.5	12.6	9.36	8.07	7.55
110	12.5	13.5	13.1	14.4	16.0	10.7	3.26	2.13	1.18	1.41	1.26	1.89	6.04	12.5	14.4	11.8	11.1	11.5	14.1
115	13.0	13.5	13.1	12.4	13.7	13.5	13.5	14.4	14.5	15.4	14.4	13.6	12.2	12.2	11.5	11.0	11.9	11.6	16.0
120	14.1	13.8	14.2	12.0	11.8	10.8	11.7	14.3	17.3	18.4	16.0	12.3	10.2	9.64	10.5	10.9	12.6	12.6	16.0
125	15.5	14.8	14.4	12.9	11.2	9.53	9.24	10.9	12.5	13.4	12.1	9.62	8.53	8.85	10.3	12.2	12.8	14.0	15.7
130	16.6	15.5	14.5	14.2	11.8	9.20	8.59	9.34	10.1	10.5	10.0	8.51	7.90	8.84	11.3	12.7	13.0	14.1	15.8
135	16.7	15.5	14.5	14.3	13.0	10.1	8.43	8.78	8.98	9.33	9.00	8.12	7.90	9.79	12.4	12.7	13.0	13.9	15.3
140	17.1	16.1	15.4	14.4	13.5	11.0	10.00	9.16	9.13	9.80	9.39	8.74	9.16	10.3	12.8	12.7	13.0	14.1	14.6
145	17.2	16.4	15.5	14.3	13.4	11.4	10.3	11.9	11.3	11.6	11.5	11.3	9.56	10.5	12.2	12.7	13.0	14.2	14.3
150	16.1	15.7	14.8	13.8	12.4	11.8	12.1	11.5	8.74	9.33	8.92	11.0	11.3	11.3	11.0	11.6	12.2	12.9	13.1
155	14.4	14.4	13.2	13.5	12.3	11.2	11.3	12.7	11.7	12.5	11.6	11.8	11.0	10.1	10.7	11.1	10.8	11.8	12.8
160	13.8	13.7	12.4	11.9	12.9	12.9	12.7	10.5	10.6	10.9	10.3	10.6	10.8	11.8	11.4	11.1	10.5	11.7	12.7
165	13.5	13.3	14.4	12.3	12.6	14.1	13.4	12.7	13.1	12.9	12.7	12.0	12.6	12.0	10.8	10.3	11.5	11.7	13.0
170	13.9	13.6	14.5	15.3	13.2	12.5	12.6	11.5	12.1	11.8	11.4	11.1	11.3	10.7	10.7	12.6	12.6	11.8	13.1
175	13.7	13.5	14.0	14.4	14.2	15.4	17.0	13.9	14.0	13.8	13.8	14.1	14.0	12.6	12.5	12.2	11.5	11.0	13.1
180	13.6	13.5	14.4	14.5	14.3	15.4	17.1	13.5	13.2	13.2	13.8	14.1	13.7	12.6	12.3	11.8	11.4	10.4	13.9

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-09-14

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:35.98V I:2.767A P:99.57W PF:1.000 Freq:0Hz Lamp Flux:12799.2x1 lm		
NAME: ALL in one Led Solar Street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: SHENZHEN LEADRAY OPTELECTRONIC CO.,LTD	SUR.:	Shielding Angle:N/A

Table--2

UNIT: cd

C(DEG) γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	3132	3137	3131	3129	3123	3156	3153	3151	3140	3146	3131	3131	3129	3134	3124	3120	3120		
5	3087	3014	2940	2872	2828	2807	2781	2769	2754	2771	2775	2817	2853	2916	2980	3031	3109		
10	3122	2965	2808	2679	2565	2498	2431	2379	2372	2401	2440	2538	2633	2756	2885	3016	3176		
15	3215	2972	2727	2522	2328	2194	2090	2020	1992	2046	2124	2252	2434	2650	2865	3082	3328		
20	3450	3077	2717	2417	2157	1970	1835	1753	1734	1774	1867	2029	2272	2589	2937	3272	3632		
25	3868	3277	2737	2315	1988	1767	1614	1527	1504	1555	1657	1840	2113	2524	3055	3643	4231		
30	4193	3269	2611	2126	1787	1561	1415	1339	1322	1380	1468	1641	1913	2330	2925	3768	4773		
35	4298	3191	2436	1947	1608	1391	1268	1212	1212	1268	1349	1496	1740	2127	2733	3695	5031		
40	4547	3184	2315	1808	1468	1283	1168	1123	1136	1192	1267	1392	1616	1976	2586	3744	5433		
45	4971	3287	2262	1693	1362	1193	1081	1039	1054	1121	1200	1314	1520	1874	2537	4002	6111		
50	5563	3464	2207	1571	1234	1059	954	905	914	985	1080	1212	1421	1777	2629	4585	7021		
55	5916	3556	2122	1435	1055	860	747	699	699	755	855	1021	1271	1686	2727	4889	7277		
60	4846	2980	1793	1167	792	605	496	425	406	464	568	730	990	1402	2198	3962	5963		
65	2352	1550	1078	728	486	409	320	241	244	266	369	458	600	852	1215	1945	2850		
70	729	636	527	380	332	304	202	206	216	207	240	334	371	443	583	696	819		
75	389	311	199	213	210	199	146	166	180	163	150	226	239	236	269	368	438		
80	264	127	87.2	77.6	94.5	91.7	86.4	111	122	107	90.8	113	122	97.8	122	194	294		
85	66.7	35.9	30.8	26.6	27.6	32.0	37.1	49.2	53.8	47.4	39.9	34.7	34.4	36.8	46.7	63.1	180		
90	19.8	20.0	17.0	14.0	9.39	5.80	5.50	6.88	8.45	7.95	7.41	8.85	12.0	15.2	19.8	26.4	30.4		
95	5.32	4.16	2.32	1.53	1.60	7.51	8.14	4.48	4.60	7.24	15.6	4.34	1.34	1.73	5.06	9.96	10.9		
100	2.43	4.14	7.90	15.3	23.7	29.3	35.9	27.4	37.7	28.1	37.5	29.5	22.2	13.2	5.96	2.77	1.99		
105	9.91	11.5	15.0	17.8	20.7	24.5	29.1	26.2	35.0	25.1	27.7	24.3	21.0	18.1	15.5	11.7	8.97		
110	16.1	16.1	15.5	15.4	17.0	19.5	22.6	20.2	25.0	18.6	20.5	18.5	16.7	15.1	15.5	17.1	16.2		
115	18.0	18.8	16.9	15.5	15.8	17.0	20.1	18.2	19.8	15.1	16.2	14.5	13.4	14.4	16.3	18.0	17.4		
120	18.0	19.5	19.6	17.6	16.9	18.7	22.6	26.5	28.2	22.2	15.3	13.9	13.4	15.1	17.9	18.0	17.3		
125	17.5	18.6	20.3	19.9	20.2	23.6	21.8	31.4	35.2	25.2	14.2	14.9	14.2	16.6	17.8	17.7	16.5		
130	17.1	17.6	19.4	21.8	24.1	22.0	22.8	24.1	29.8	23.8	13.5	15.5	16.7	17.0	17.4	17.4	16.5		
135	16.6	17.0	19.2	22.3	23.8	16.3	23.2	24.1	27.3	22.8	15.3	15.4	16.9	17.0	16.9	16.4	15.8		
140	15.8	17.0	17.9	20.4	21.2	23.2	21.6	13.0	12.2	21.5	21.4	14.5	16.5	16.7	16.4	15.7	15.2		
145	14.6	15.7	16.2	17.2	18.0	25.5	16.8	13.0	13.3	19.9	22.4	14.6	15.1	15.3	15.2	15.0	14.4		
150	13.9	14.5	15.6	17.2	16.5	25.0	17.0	13.1	12.5	17.0	22.9	15.3	14.7	14.6	13.9	13.2	13.0		
155	12.6	13.6	15.3	17.1	16.6	23.1	15.0	12.8	11.7	13.1	19.8	14.8	14.4	14.1	12.5	12.6	11.7		
160	12.5	13.3	13.9	16.1	16.1	22.7	16.9	13.7	11.2	10.7	18.0	14.1	11.9	12.3	11.1	11.8	11.4		
165	13.4	12.3	14.2	14.3	13.8	19.5	17.2	13.5	12.5	11.6	16.5	14.5	11.5	10.0	10.2	10.2	11.4		
170	13.4	13.6	12.9	13.4	14.9	16.6	17.6	13.3	13.3	12.5	15.1	14.9	12.5	9.86	8.78	8.61	10.1		
175	13.1	13.5	13.4	13.9	13.5	14.9	16.9	12.7	12.9	12.6	13.6	14.9	13.0	11.4	10.9	10.6	8.98		
180	13.8	13.5	14.3	14.6	14.4	15.6	17.0	13.3	13.3	13.4	13.7	14.4	13.7	12.5	12.3	11.8	11.4		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2017-09-14

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4470]
 Remarks: